



ACE1430M

N-Channel 30-V MOSFET

Description

The ACE1430M uses advanced trench technology to provide excellent $R_{DS(ON)}$ and low gate charge. This device is suitable for use as a load switch or in PWM applications. The source leads are separated to allow a Kelvin connection to the source, which may be used to bypass the source inductance.

Features

- Low $r_{DS(on)}$ trench technology
- Low thermal impedance
- Fast switching speed

Applications

- DC/DC Conversion
- Power Routing
- Motor Drives

Absolute Maximum Ratings

Parameter		Symbol	Limit	Units
Drain-Source Voltage		V_{DS}	30	V
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current ^a	$T_A=25^\circ\text{C}$	I_D	14	A
	$T_A=70^\circ\text{C}$		11	
Pulsed Drain Current ^b		I_{DM}	50	A
Continuous Source Current (Diode Conduction) ^a		I_S	3.8	A
Power Dissipation ^a	$T_A=25^\circ\text{C}$	P_D	3	W
	$T_A=70^\circ\text{C}$		1.9	
Operating temperature / storage temperature		T_J/T_{STG}	-55~150	$^\circ\text{C}$

THERMAL RESISTANCE RATINGS

Parameter		Symbol	Maximum	Units
Maximum Junction-to-Ambient ^a	$t \leq 10 \text{ sec}$	$R_{\theta JA}$	40	$^\circ\text{C/W}$
	Steady State		90	

Notes

a. Surface Mounted on 1" x 1" FR4 Board.

b. Pulse width limited by maximum junction temperature





ACE1430M

N-Channel 30-V MOSFET

Packaging Type

DFN2*2-6L

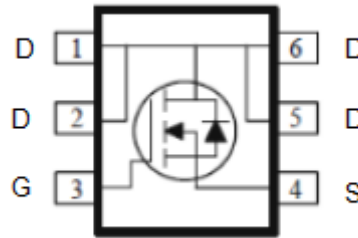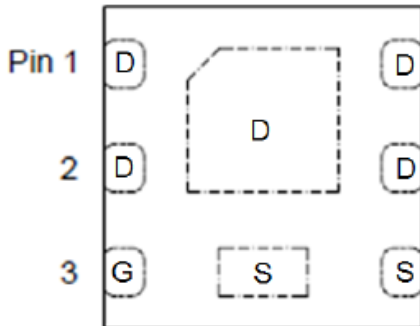

- 1. DRAIN
- 2. DRAIN
- 3. GATE
- 4. SOURCE
- 5. DRAIN
- 6. DRAIN

Ordering information

ACE1430M MN + H

- └─ Halogen - free
- └─ Pb - free
- └─ MN : DFN2*2-6L



ACE1430M

N-Channel 30-V MOSFET

Electrical Characteristics

$T_A=25^{\circ}\text{C}$, unless otherwise specified.

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Static						
Gate-Source Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250 \mu\text{A}$	1			V
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0 \text{ V}, V_{GS} = \pm 20 \text{ V}$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 24 \text{ V}, V_{GS} = 0 \text{ V}$			1	uA
		$V_{DS} = 24 \text{ V}, V_{GS} = 0 \text{ V}, T_J = 55^{\circ}\text{C}$			25	
On-State Drain Current	$I_{D(on)}$	$V_{DS} = 5 \text{ V}, V_{GS} = 10 \text{ V}$	20			A
Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{GS} = 10 \text{ V}, I_D = 11 \text{ A}$			10.5	m Ω
		$V_{GS} = 4.5 \text{ V}, I_D = 8.8 \text{ A}$			18	
Forward Transconductance	g_{FS}	$V_{DS} = 15 \text{ V}, I_D = 11 \text{ A}$		13		S
Diode Forward Voltage	V_{SD}	$I_S = 1.9 \text{ A}, V_{GS} = 0 \text{ V}$		0.77		V
Dynamic						
Total Gate Charge	Q_g	$V_{DS} = 15 \text{ V}, V_{GS} = 4.5 \text{ V}, I_D = 11 \text{ A}$		11		nC
Gate-Source Charge	Q_{gs}			4.9		
Gate-Drain Charge	Q_{gd}			3.5		
Turn-On Delay Time	$t_{d(on)}$	$V_{DS} = 15 \text{ V}, R_L = 1.4 \Omega, I_D = 11 \text{ A},$ $V_{GEN} = 10 \text{ V}, R_{GEN} = 6 \Omega$		6		ns
Rise Time	t_r			6		
Turn-Off Delay Time	$t_{d(off)}$			29		
Fall Time	t_f			8		
Input Capacitance	C_{iss}	$V_{DS} = 15 \text{ V}, V_{GS} = 0 \text{ V}, f = 1 \text{ Mhz}$		1379		pF
Output Capacitance	C_{oss}			156		
Reverse Transfer Capacitance	C_{rss}			115		


Note :

- Pulse test: PW $\leq 300\mu\text{s}$ duty cycle $\leq 2\%$.
- Guaranteed by design, not subject to production testing




ACE1430M N-Channel 30-V MOSFET


Typical Performance Characteristics

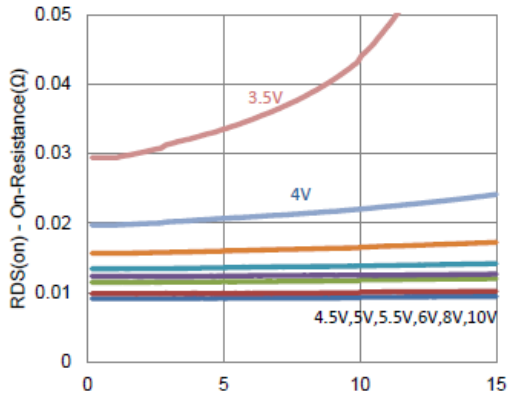


1. On-Resistance vs. Drain Current

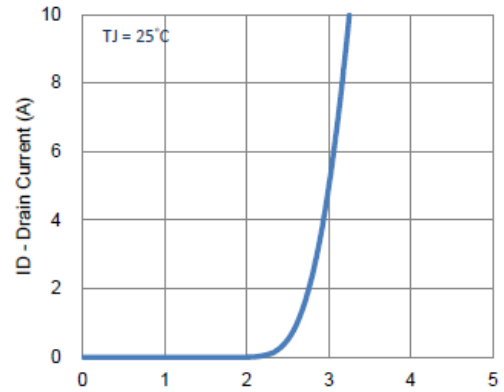


2. Transfer Characteristics

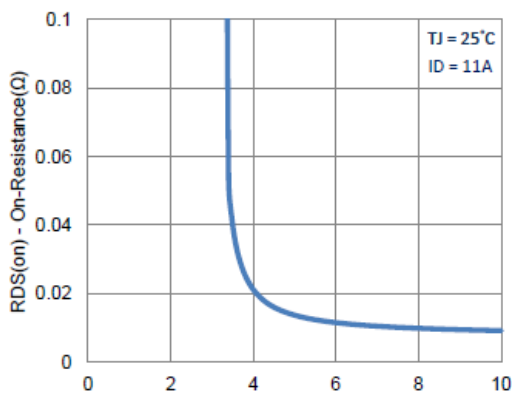


3. On-Resistance vs. Gate-to-Source Voltage

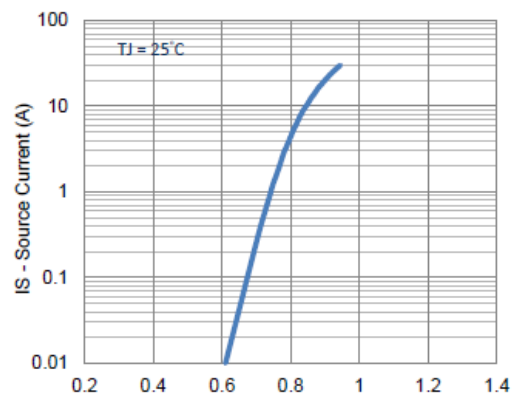

4. Drain-to-Source Forward Voltage

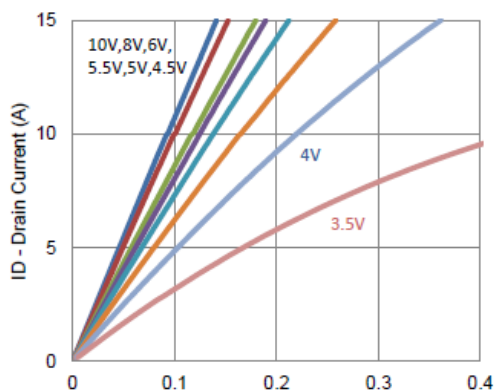

5. Output Characteristics

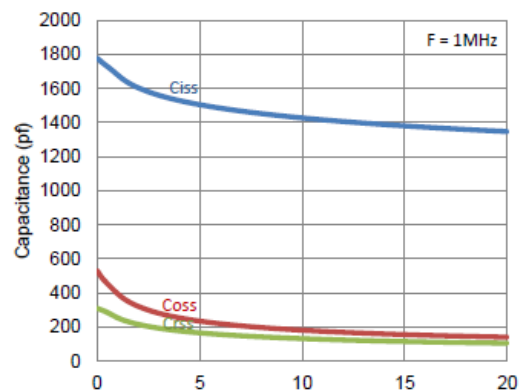


6. Capacitance




ACE1430M N-Channel 30-V MOSFET


Typical Performance Characteristics

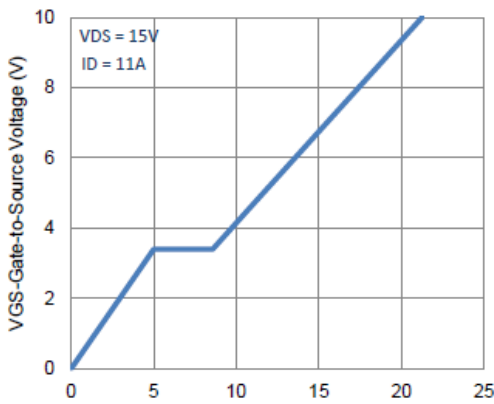


Qg - Total Gate Charge (nC)
7. Gate Charge

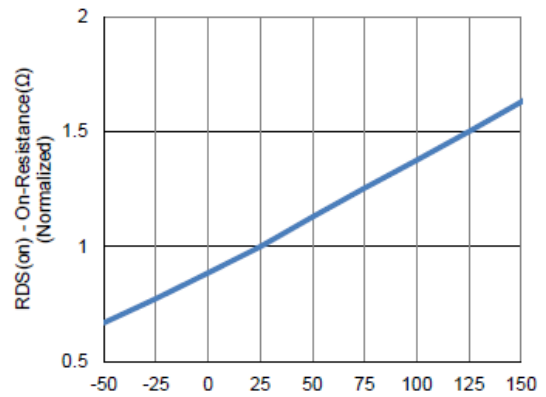


TJ - Junction Temperature (°C)
8. Normalized On-Resistance Vs Junction Temperature

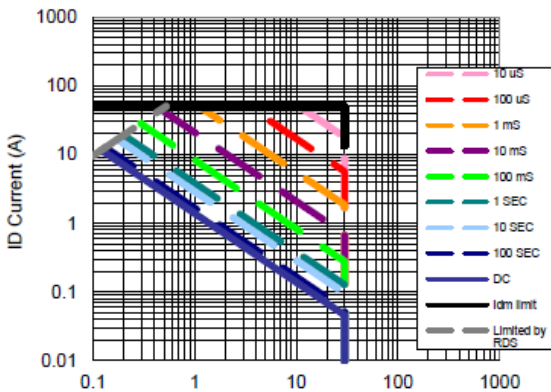

VDS Drain to Source Voltage (V)
9. Safe Operating Area

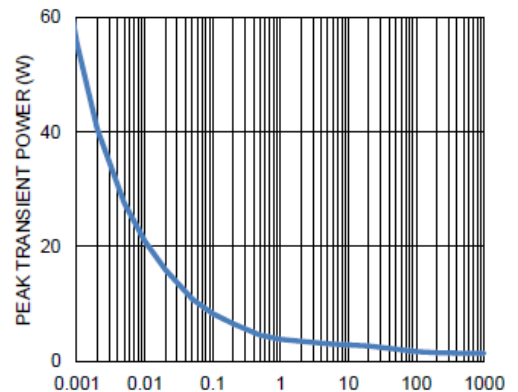

t1 TIME (SEC)
10. Single Pulse Maximum Power Dissipation

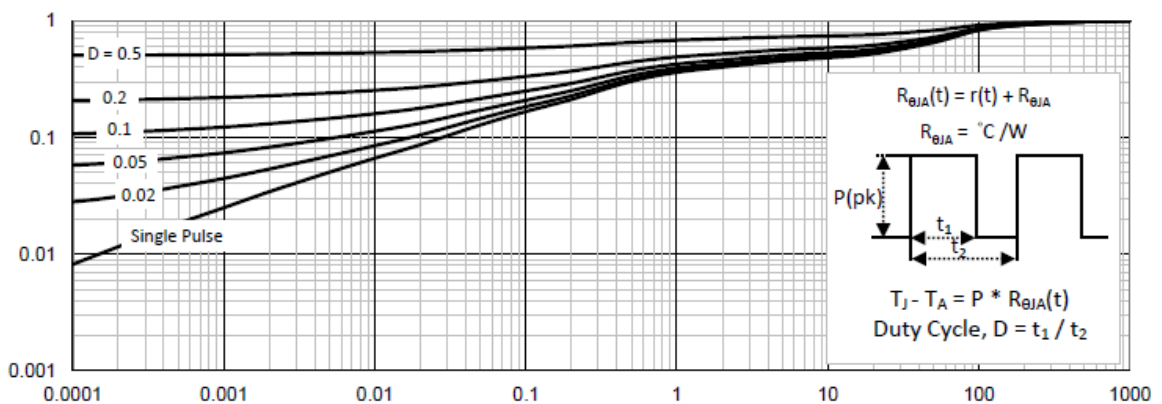

t1 TIME (sec)
11. Normalized Thermal Transient Junction to Ambient




ACE1430M

N-Channel 30-V MOSFET

Packing Information

DFN2*2-6PP

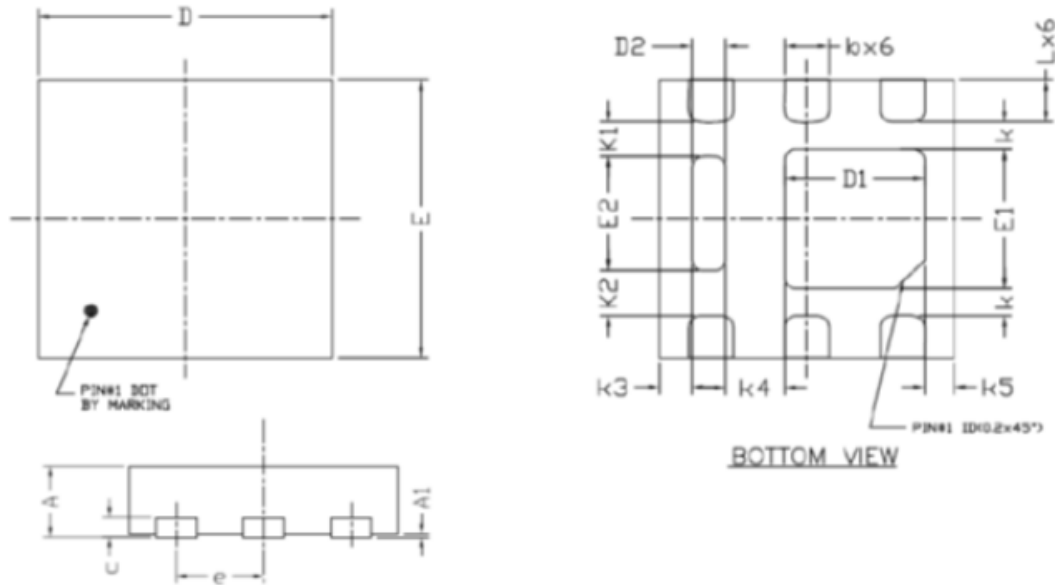

SYMBOLS	DIMENSIONS IN MILLIMETERS			DIENSIONS IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.50	0.55	0.60	0.020	0.022	0.024
A1	0.00		0.05	0.000		0.002
b	0.25	0.30	0.25	0.010	0.012	0.014
c	0.152REF			0.006REF		
D	1.90	2.00	2.10	0.075	0.078	0.083.
D1	0.85	0.95	1.05	0.033	0.033	0.041
D2	0.13	0.23	0.33	0.005	0.005	0.013
E	1.90	2.0	2.10	0.075	0.075	0.083
E1	0.90	1.00	1.10	0.035	0.035	0.043
E2	0.72	0.82	0.92	0.028	0.028	0.036
e	0.65BSC			0.026BSC		
K	0.20BSC			0.048BSC		
K1	0.25BSC			0.010BSC		
K2	0.33BSC			0.013BSC		
K3	0.22BSC			0.009BSC		
K4	0.40BSC			0.016BSC		
K5	0.20BSC			0.008BSC		
L	0.25	0.30	0.25	0.010	0.012	0.014

Unit: mm



ACE1430M

N-Channel 30-V MOSFET

Notes

ACE does not assume any responsibility for use as critical components in life support devices or systems without the express written approval of the president and general counsel of ACE Electronics Co., LTD. As sued herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ACE Technology Co., LTD.
<http://www.ace-ele.com/>