



ACE11S1008B

N-Channel Enhancement Mode Power MOSFET

Description

- load switch
- battery protection applications

Features

- $V_{DS} = 100V$,
- $I_D = 43.5A$
- $R_{DS(ON)} @V_{GS} = 10V$, TYP 9.6 m Ω
- $R_{DS(ON)} @V_{GS} = 6.0V$, TYP 11m Ω
- $R_{DS(ON)} @V_{GS} = 4.5V$, TYP 13.3m Ω

Absolute Maximum Ratings

@ $T_A=25^\circ C$ unless otherwise noted

| Parameter | Symbol | Ratings | Units | |
|---|---------------|------------------|------------|---|
| Drain-Source Voltage | V_{DSS} | 100 | V | |
| Gate-Source Voltage | V_{GSS} | ± 20 | V | |
| Drain Current (Continuous) *AB | I_D | $T_C=25^\circ C$ | 43.5 | A |
| | | $T_C=70^\circ C$ | 34.9 | |
| Drain Current (Pulsed) *C | I_{DM} | 80 | A | |
| Power Dissipation | P_D | $T_C=25^\circ C$ | 57 | W |
| Operating Temperature / storage Temperature | T_J/T_{STG} | -55~150 | $^\circ C$ | |

Thermal Resistance Ratings

| Parameter | Symbol | Typical | Maximum | Units |
|-----------------------------|------------|---------|---------|--------------|
| Maximum Junction-to-Ambient | R_{thJA} | 21 | 26 | $^\circ C/W$ |
| Maximum Junction-to-Lead | R_{thJC} | 1.7 | 2.2 | |

Note :

- The value of R_{thJA} is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ C$. The value in any given application depends on the user's specific board design
- The current rating is based on the $\leq 10s$ junction to ambient thermal resistance rating.
- Repetitive rating, pulse width limited by junction temperature




ACE11S1008B

N-Channel Enhancement Mode Power MOSFET

Ordering information

ACE11S1008B XX + H

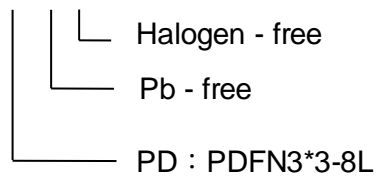



ACE11S1008B

N-Channel Enhancement Mode Power MOSFET

Notes

ACE does not assume any responsibility for use as critical components in life support devices or systems without the express written approval of the president and general counsel of ACE Technology Co., LTD. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ACE Technology Co., LTD.
<http://www.ace-ele.com/>