



ACE25QC256GC

256M Bit SPI Nor Flash

Description

The ACE25QC256GC is 256M-bit Serial Peripheral Interface (SPI) Flash memory, supports the Dual/Quad SPI: Serial Clock, Chip Select, Serial Data I/O0 (SI), I/O1 (SO), I/O2 (/WP), and I/O3 (/HOLD), Reset; and supports the QPI: Serial Clock, Chip Select, I/O0, I/O1, I/O2, and I/O3, Reset; The Dual I/O data is transferred with speed of 216Mbits/s and the Quad I/O & Quad output & QPI data is transferred with speed of 432Mbits/s. The Double Transfer Rate (DTR) Read is transferred with speed of 432Mbits/s. The device uses a single low voltage power supply, ranging from 2.7 Volt to 3.6 Volt.

Additionally, the device supports JEDEC standard manufacturer and device ID and three 512-bytes Security Registers.

In order to meet environmental requirements, offers 8-pin SOP 208mil, 8-pad WSON 5x6-mm, 8-pad WSON 6x8-mm, 16-pin SOP 300mil.

Features

- Serial Peripheral Interface
 - Standard SPI: SCLK, /CS, SI, SO, /WP, /HOLD
 - Dual SPI: SCLK, /CS, IO0, IO1, /WP, /HOLD
 - Quad SPI: SCLK, /CS, IO0, IO1, IO2, IO3
 - QPI: SCLK, /CS, IO0, IO1, IO2, IO3
 - DTR (Double Transfer Rate) Read
 - 3 or 4-Byte Addressing Mode
- Read
 - Normal Read (Serial): 55MHz clock rate
 - Fast Read (Serial): 108MHz clock rate with 30PF load
 - Dual I/O data transfer up to 216Mbits/S
 - Quad I/O & QPI data transfer up to 432Mbits/S
 - DTR Quad I/O Data transfer up to 432Mbits/s
 - Allows XIP (execute in place) Operation: Continuous Read with 8/16/32/64-byte Wrap
- Program
 - Serial-input Page Program up to 256bytes
 - Program Suspend and Resume
- Erase
 - Block Erase (64/32 KB)
 - Sector Erase (4 KB)
 - Chip Erase
 - Erase Suspend and Resume



ACE25QC256GC

256M Bit SPI Nor Flash

- Program/Erase Speed
 - Page Program time: 0.6ms typical
 - Sector Erase time: 50ms typical
 - Block Erase time: 0.15/0.25s typical
 - Chip Erase time: 80s typical
- Flexible Architecture
 - Sector of 4K-byte
 - Block of 32/64K-byte
- Low Power Consumption
 - 25mA maximum active current
 - 5uA maximum power down current
- Software/Hardware Write Protection
 - 3x512-Byte Security Registers with OTP Locks
 - Discoverable Parameters (SFDP) register
 - Enable/Disable protection with /WP Pin
 - Top/Bottom, Complement array protection
 - Advanced Block/Sector Protection (Solid and Password Protect)
- Single Supply Voltage
 - Full voltage range: 2.7~3.6V
- Temperature Range
 - Industrial (-40°C to 85°C)
- Cycling Endurance/Data Retention
 - Typical 100k Program-Erase cycles on any sector
 - Typical 20-year data retention




ACE25QC256GC

256M Bit SPI Nor Flash

Ordering information

ACE25QC256GC XXX + X H

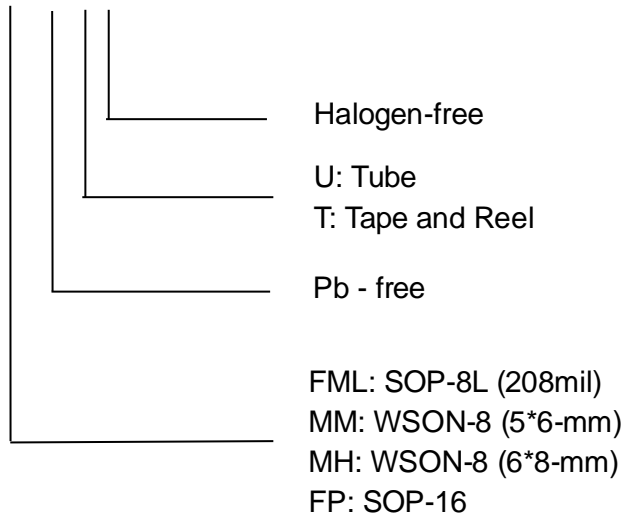



ACE25QC256GC

256M Bit SPI Nor Flash

Notes

ACE does not assume any responsibility for use as critical components in life support devices or systems without the express written approval of the president and general counsel of ACE Technology Co., LTD. As sued herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ACE Technology Co., LTD.
<http://www.ace-ele.com/>