



ACE40566P

1A, Single Li-ion Battery Charger

Description

The ACE40566P is a complete constant-current/ constant voltage linear charger for single cell Lithium-Ion batteries. No external sense resistor is needed, and no blocking diode is required due to the internal MOSFET architecture. The charge voltage is fixed at 4.2V, 4.35V, 4.4V and 4.45V. The charge current can be programmed from 100mA to 1A by an externally single resistor. The ACE40566P automatically terminates the charge cycle when the charge current drops to 1/10 the programmed value after the final float voltage is reached. When the input supply (wall adapter or USB supply) is removed, the ACE40566P automatically enters a low current state, dropping the battery drain current to less than 0.1uA.

The ACE40566P is available in ESOP-8 and DFN2x2-8 packages. Standard product is Pb-Free & Halogen- Free.

Features

- Programmable Charge Current Up to 1A
- Under Voltage Lockout Protection
- Automatic Recharge
- Charge Status Output Indication
- Standby Status Output Indication
- Enable Control Function
- Support NTC Battery Temperature Detection
- 2.9V(Typ.) Trickle Charge Threshold
- Input OVP Protection
- Protection for Battery Reverse Connection

Application

- Feature Phone
- MP3/MP4 Players
- Electric Toy
- Bluetooth, wireless handsets
- Others portable electronic device



ACE40566P

1A, Single Li-ion Battery Charger

Absolute Maximum Ratings (Note)

Symbol	Items	Value	Unit	
V _{CC}	Input Voltage	-0.3 ~ 9	V	
V _{BAT}	BAT Voltage	-5 ~ 7	V	
All other pins	Input Voltage	-0.3 ~ V _{CC} +0.3	V	
P _D	Maximum Power Dissipation	ESOP-8	1.8	W
		DFN2x2-8	1.0	W
R _{θJA}	Junction to Ambient Thermal Resistance	ESOP-8	55	°C/W
		DFN2x2-8	100	°C/W
T _J	Junction Temperature	-40~125	°C	
T _{STG}	Storage Temperature	-55 to 150	°C	
T _{SOLDER}	Package Lead Soldering Temperature	260°C, 10s		
V _{ESD}	Human Body Mode	±5	KV	


Note: Exceed these limits may damage the device. Exposure to absolute maximum rating conditions may affect device reliability.

Recommended Operating Conditions

Symbol	Items	MIN	NOM	MAX	UNIT
V _{CC}	Input operating voltage range	4.5	5	6.0	V
I _{BAT}	Battery charge current range	100	500	1000	mA
R _{PROG}	CC mode charge current programming resistor	1	2	10	KΩ

Ordering information

ACE40566P XX XX + H

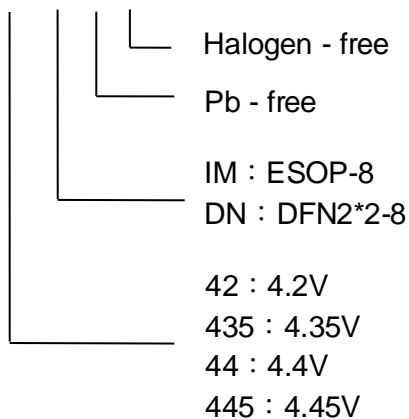



ACE40566P

1A, Single Li-ion Battery Charger

Notes

ACE does not assume any responsibility for use as critical components in life support devices or systems without the express written approval of the president and general counsel of ACE Technology Co., LTD. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ACE Technology Co., LTD.
<http://www.ace-ele.com/>