



ACE44551P

1A Single Li-ion Battery Charger

Description

The ACE44551P is a complete constant-current/constant voltage linear charger for single Lithium-Ion battery with high input voltage rating and large current. The largest input voltage is up to 27V and charge current is up to 1A. The input over voltage protection thread is 6.8V and the lowest input voltage is 3.8V, which can meet the requirement of voltage-adjustment to reduce charging power consumption and improve overall efficiency. External isolation diodes are not required due to the internal PMOS architecture and anti-reverse charging circuit. Thermal feedback regulates the charge current to limit the die temperature during high power operation or high ambient temperature.

The charge voltage is fixed at 4.0V/4.1V/4.15V/4.2V/4.35V/4.4V /4.45V, and the charge current can be programmed externally with a single resistor. The ACE44551P automatically terminates the charge cycle when the charge current drops to 1/10 the programmed value after the final float voltage is reached. When the input voltage (supplied by AC adapter or USB power supply) is removed, the ACE44551P automatically enters a low current state, decreasing the battery leakage current to less than 1 μ A. Other features of ACE44551P include over temperature protection, under voltage lockout, automatic recharge and charging state indication (two LED pins to show charge state and charge-ending state).

Features

- Maximum Input Voltage: up to 27V
- Minimum Input Voltage: 3.8V (Typ.)
- Input Over Voltage Protection: 6.8V (Typ.)
- Maximum BAT withstand voltage up to 20V
- Trickle charge threshold: 2.9V (Typ. Float Voltage: 4.2V)
- Programmable Charge Current up to 1A
- 1% Charge Voltage Accuracy
- C/10 Termination Charge Current, automatically recharge
- Battery reverse connection protection
- Thermal Regulation to Maximize Charge Rate Without Risk of Overheating.
- Charging status and fault status indication
- Soft-start and surge current limit
- No anti-backcharge MOSFETs, detection resistors, or isolation diodes are required
- Available SOT-23-6/ ESOP-8/ DFN2*2-8/ DFN3*3-8L Package

Applications

- PDA 、 GPS 、 Mobile phone 、 Digital camera
- Portable devices 、 Various charger
- Portable power source/Standby power supply



ACE4451P

1A Single Li-ion Battery Charger

Absolute Maximum Ratings ^(Note)

Symbol	Items	Value	Unit	
V_{CC}	Input Voltage	-0.3~27	V	
V_{BAT}	BAT Voltage	-5~20	V	
$V_{CHG}, V_{FULL}, V_{TEMP}$	CHG/FULL/TEMP Voltage	-0.3~26	V	
V_{PROG}, V_{CE}	PROG/CE Voltage	-0.3~7	V	
I_{BAT}	BAT Pin Current	SOT-23-6	600	mA
		ESOP-8	1000	mA
		DFN2*2-8	900	mA
		DFN3*3-8L	1000	mA
P_{DMAX}	Maximum Power Dissipation	SOT-23-6	0.5	W
		ESOP-8	2	W
		DFN2*2-8	1	W
		DFN3*3-8L	1.5	W
$R_{\theta JA}$	Junction to Ambient Thermal Resistance	SOT-23-6	270	°C/W
		ESOP-8	60	°C/W
		DFN2*2-8	100	°C/W
		DFN3*3-8L	67	°C/W
T_J	Junction Temperature	-40 to 150	°C	
T_A	Ambient Temperature	-40 to 85	°C	
T_{STG}	Storage Temperature	-55 to 150	°C	
T_{SOLDER}	Soldering Temperature	260°C, 10s		

Note:

Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Recommended Operating Condition

Symbol	Items	Min	Max	Unit
V_{CC}	Input Voltage Range	3.8	24	V
I_{BAT}	Charge Current Range	100	1000 ^(Note)	mA
R_{PROG}	Charge Current Programming Resistor	1	10	KΩ

Note:

Determined by the maximum power dissipation, PCB heat sink function, and the junction temperature in the defined temperature mode.




ACE44551P

1A Single Li-ion Battery Charger

Ordering Information

ACE44551P XXX XX + H

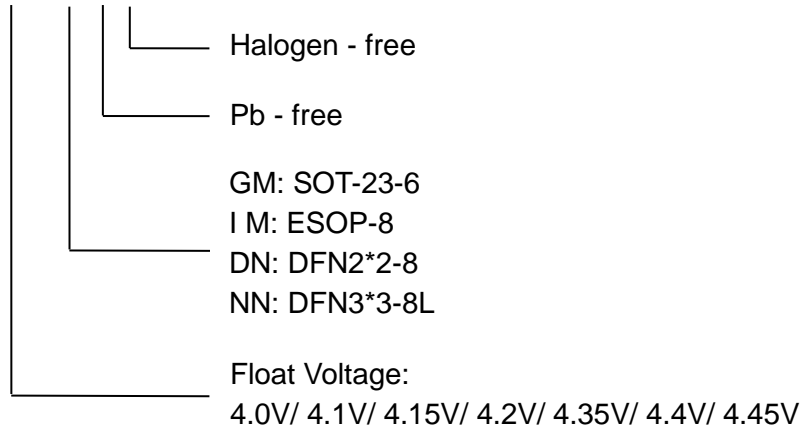



ACE44551P

1A Single Li-ion Battery Charger

Notes

ACE does not assume any responsibility for use as critical components in life support devices or systems without the express written approval of the president and general counsel of ACE Technology Co., LTD. As sued herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ACE Technology Co., LTD.
<http://www.ace-ele.com/>