



ACE515C

300mA High PSRR, Fast Response Linear Regulator

Description

ACE515C series is a group of positive voltage output, low power consumption, low dropout voltage regulator.

ACE515C can provide output value in the range of 1.0V~4.5V every 0.1V step. It also can be customized on command.

ACE515C includes high accuracy voltage reference, error amplifier, and current limit circuit and output driver module with discharge capability.

ACE515C has excellent load and line transient response and good temperature characteristics, which can assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$.

Features

- Low Power Consumption: 35uA (Typ.)
- Low output noise (47uVRMS)
- Standby Mode: 0.1uA
- Low dropout Voltage: 300mV @300mA (Typ.)
- High Ripple Rejection: 70dB @1KHz (Typ.)
- Low Temperature Coefficient: $\pm 100\text{ppm}/^\circ\text{C}$
- Excellent Line regulation: 0.05%/V
- Build-in chip enable and discharge circuit
- Output Voltage Range: 1.0V~4.5V (customized on command every 0.1V step)
- Highly Accurate: $\pm 2\%$
- Output Current Limit

Application

- Power source for cellular phones and various kind of PCSs
- Battery Powered equipment
- Power Management of MP3, PDA, DSC, Mouse, PS2 Games
- Reference Voltage Source
- Regulation after Switching Power



ACE515C

300mA High PSRR, Fast Response Linear Regulator

Absolute Maximum Ratings

Parameter		Value
Max Input Voltage		8V
Operating Junction Temperature(Tj)		125°C
Output Current		300mA
Ambient Temperature(Ta)		-40°C –85°C
Package Thermal Resistance (θ_{JA})	SOT-23-5	220°C / W
	SOT-23-3	220°C / W
Power Dissipation	SC70-5	250mW
	SOT-23-5	250mW
	SOT-23-3	250mW
	DFN1x1-4	600mW
Storage Temperature(Ts)		-40°C -150°C
Lead Temperature & Time		260°C,10S

Note:

1. Heat Sink Area of PCB for DFN1x1-4 is recommended at least 2.5mmx4mm.
2. Package Thermal Resistance value can be affected by PCB design, outside radiator, ambient airflow, operating power, it just shows for reference.
3. Exceed these limits to damage to the device.
4. Exposure to absolute maximum rating conditions may affect device reliability.

Recommended Work Conditions

Item	Min	Max.	Unit
Input Voltage Range	2	6	V
Ambient Temperature	-40	85	°C




ACE515C

300mA High PSRR, Fast Response Linear Regulator

Ordering information

ACE515C XX XX + H

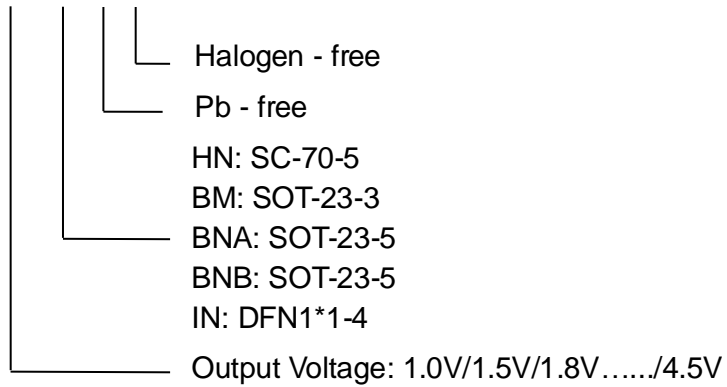



ACE515C

300mA High PSRR, Fast Response Linear Regulator

Notes

ACE does not assume any responsibility for use as critical components in life support devices or systems without the express written approval of the president and general counsel of ACE Technology Co., LTD. As sued herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ACE Technology Co., LTD.
<http://www.ace-ele.com/>