



ACE576P

36V, Low Quiescent Current, High Reliability LDO

Description

The ACE576P series is a high accuracy, high input voltage low quiescent current, high speed, and low dropout liner regulator with high ripple rejection.

The input voltage is up to 36V and load current is up to 300mA at $V_{OUT} = 5V$ & $V_{IN} = 7V$. The device is manufactured with BCD process. The ACE576P offers over-current limit, soft start and over temperature protection to ensure the device working in well conditions.

Features

- Input voltage: 4.75V~36V
- Output voltage: 1.8V~5.7V
- Output accuracy: $< \pm 2\%$
- Output current: 150mA (Typ.)
- PSRR: 60dB @ 100Hz
- Dropout voltage: 600mV @ $I_{OUT} = 100mA$
- Quiescent current: 4.2 μA @ $V_{IN} = 12V$ (Typ.)
- ESD HBM: 8KV
- Recommend capacitor: 10 μF

Application

- Smart electric meter
- In-car entertainment
- Electric bicycle

Absolute Maximum Ratings ^(Note)

| Symbol | Items | Value | Unit |
|--------------|--|-------------|------|
| V_{IN} | Input Voltage | -0.3~36 | V |
| V_{OUT} | Output Voltage | -0.3~6.5 | V |
| P_{DMAX} | Power Dissipation | OTP limited | W |
| T_J | Junction Temperature | -40~150 | °C |
| T_{stg} | Storage Temperature | -55 to 150 | °C |
| T_{solder} | Package Lead Soldering Temperature (10s) | 260 | °C |
| ESD MM | Machine Mode | 200 | V |
| ESD HBM | Human Body Mode | 8000 | V |

Note: Exceed these limits to damage to the device. Exposure to absolute maximum rating conditions may affect device reliability.



ACE576P


36V, Low Quiescent Current, High Reliability LDO

Recommended Operating Range

| Symbol | Items | Value | Unit |
|-----------------|---------------------------|------------|---------------|
| V_{IN} | VIN Supply Voltage | 4.75 to 36 | V |
| $R_{\theta JA}$ | Thermal Resistance on PCB | 45 | $^{\circ}C/W$ |
| T_{OPT} | Operating Temperature | -40 to 105 | $^{\circ}C$ |

Ordering information

ACE576PXX XX + H

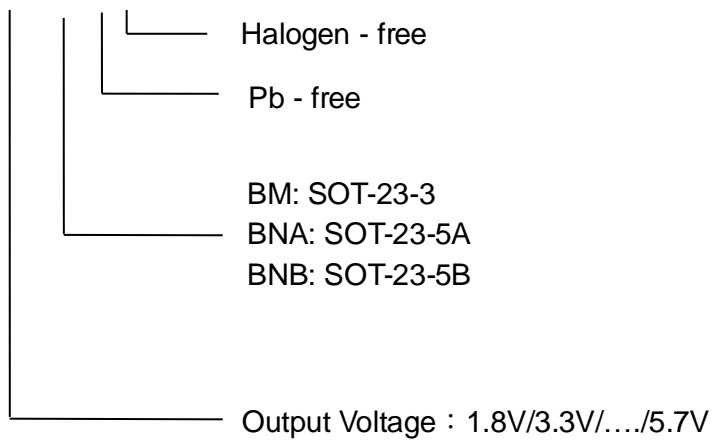



ACE576P

36V, Low Quiescent Current, High Reliability LDO

Notes

ACE does not assume any responsibility for use as critical components in life support devices or systems without the express written approval of the president and general counsel of ACE Technology Co., LTD. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ACE Technology Co., LTD.
<http://www.ace-ele.com/>