



ACE25AW200E

2M bits Dual I/O Serial Flash Memory

Description

The ACE25AW200E (2M-bits) Serial flash supports the standard Serial Peripheral Interface (SPI), and supports the Dual SPI: Serial Clock, Chip Select, Serial Data I/O0 (SI), I/O1 (SO). The Dual I/O data is transferred at a speed of 80Mbits/s.

Features

- 2M -bit Serial Flash
 - 256 K-byte
 - 256 bytes per programmable page
- Standard, Dual SPI
 - Standard SPI: SCLK, CS#, SI, SO
 - Dual SPI: SCLK, CS#, IO0, IO1
- Flexible Architecture
 - Sector of 4K-byte
 - Block of 64k-byte
- Software Write Protection
 - Write protect all/portion of memory via soft- ware
- Package Options
 - See 1.1 Available Ordering OPN
 - All Pb-free packages are compliant RoHS, Halo- gen-Free and REACH.
- Temperature Range & Moisture Sensitivity Level
 - Industrial Level Temperature. (-40°C to 85°C), MSL3
 - Low Power Consumption
 - 20mA maximum active current
 - 5uA typical Standby current
- Single Power Supply Voltage:
 - 1.65~3.60V
- Support 128 bits Unique ID
- Minimum 100,000 Program/Erase Cycle
- High Speed Clock Frequency
 - 60MHz for fast read with 30pF load
 - Dual I/O Data transfer up to 80Mbits/s
- Program/Erase Speed
 - Page Program time: 2.5ms typical
 - Sector Erase time: 110ms typical
 - Block Erase time: 0.8s typical
 - Chip Erase time: 3s typical



ACE25AW200E

2M bits Dual I/O Serial Flash Memory

Absolute Maximum Ratings

Parameter	Value	Unit
Ambient Operating Temperature	-40 to 85	°C
Storage Temperature	-65 to 150	°C
Output Short Circuit Current	200	mA
Applied Input/ Output Voltage	-0.5 to 4.0	V
VCC	-0.5 to 4.0	V




ACE25AW200E

2M bits Dual I/O Serial Flash Memory

Ordering information

ACE25AW200E XX + X H

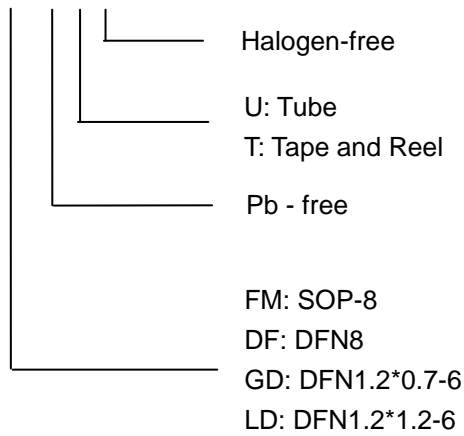



ACE25AW200E

2M bits Dual I/O Serial Flash Memory

Notes

ACE does not assume any responsibility for use as critical components in life support devices or systems without the express written approval of the president and general counsel of ACE Technology Co., LTD. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.