



ACE25GD04A

SPI 4K Bits Serial EEPROM

Description

The ACE25GD04A devices are Electrically Erasable Programmable Memory (EEPROM) organized as 512*8 bits, accessed through the SPI bus. The ACE25GD04A can operate with a supply range from 1.7V to 5.5V.

Features

- Serial Peripheral Interface (SPI) data transfer protocol
- Memory array:
4k bits (512 bytes) of EEPROM
Page size: 16 bytes
- Single supply voltage and high speed:
VCC ≥ 1.7V 5MHz
VCC ≥ 2.5V 10MHz
VCC ≥ 4.5V 20MHz
- Random and sequential Read modes
- Write:
Write within 3.5ms
Partial Page Writes Allowed
- Write Protect: quarter, half or whole memory array
- High-reliability
Endurance: 4 Million Write Cycles
Data Retention: 100 Years
- Enhanced ESD/Latch-up protection
HBM 4000V
- SOP-8/ TSSOP-8/ UDFN8 packages

Absolute Maximum Ratings

| Parameters | Ratings | Units |
|---|-------------|-------|
| Storage Temperature | -65 to 150 | °C |
| Voltage on any Pin with Respect to Ground ^(Note) | -0.5 to 6.5 | V |
| VESD (HBM) | 4000 | V |

Note:

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.



ACE25GD04A

SPI 4K Bits Serial EEPROM

Reliability Characteristics (Note 1)

| Parameters | Symbol | MIN | Units |
|----------------|--------------------------------|-----------|----------------------|
| Endurance | NEND <small>(Note 2,3)</small> | 4,000,000 | Program/Erase Cycles |
| Data Retention | TDR | 100 | Years |

Note:

1. These parameters are tested initially and after a design or process change that affects the parameter according to appropriate JEDEC test methods.

2. Page Mode, VCC = 5 V, 25°C.

3. The DC input voltage on any pin should not be lower than -0.5V or higher than VCC+0.5V. During transitions, the voltage on any pin may undershoot to no less than -1.5V or overshoot to no more than VCC+1.5V, for periods of less than 20 ns.




ACE25GD04A

SPI 4K Bits Serial EEPROM

Ordering Information

ACE25GD04A XX XX + X H

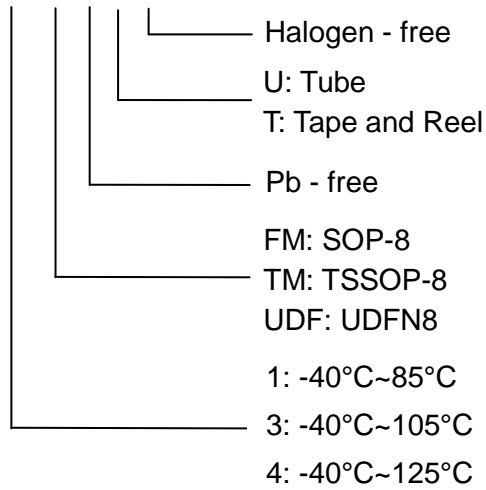



ACE25GD04A

SPI 4K Bits Serial EEPROM

Notes

ACE does not assume any responsibility for use as critical components in life support devices or systems without the express written approval of the president and general counsel of ACE Technology Co., LTD. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ACE Technology Co., LTD.
<http://www.ace-ele.com/>