



# ACE40515D

## 1.2A Linear Lithium Battery Charger With Thermal Regulation

### Description

The ACE40515D is a complete constant-current/ constant-voltage linear charger for single cell lithium rechargeable battery. No external sense resistor is needed, and no blocking diode is required due to the internal P-MOSFET architecture. Furthermore, the ACE40515D is specifically designed to work with in USB power specifications. Its low external component count makes the ACE40515D ideally suited for portable applications. Thermal feedback regulates the charge current to limit their temperature during high power operation or high ambient temperature. The charge current can be programmed externally with a single resistor. The ACE40515D automatically terminates the charge cycle when the charge current drops to 1/10th the programmed value after the final float voltage is reached. When the input supply (wall adapter or USB supply) is removed, the ACE40515D automatically enters a low power sleep mode, dropping the battery drain current to less than 2 $\mu$ A. The ACE40515D can be put into shutdown mode, reducing the supply current to 50 $\mu$ A. Other features include battery pack temperature monitor, under voltage lockout, automatic recharge and two status pins to indicate charging and charge termination.

### Features

- Charges Single Cell Lithium Battery Directly from USB Port or AC Adapter
- Input Voltage Range From 4.5V to 24V
- Input OVP : 6.5V
- No External MOSFET, Sense Resistor or Blocking Diode Required
- Preset 3.7V/4.15V/4.20V/4.35V/4.40V Charge Voltage
- Continuous Programmable Charge Current Up to 1.2A
- Recharge Conditioning for Reviving Deeply Discharged Cells and Minimizing Heat Dissipation during Initial Stage of Charge
- Constant-Current/Constant- Voltage/Constant Temp Operation with Thermal Regulation to Maximize Charge Rate Without Risk of Overheating
- Battery Reverse Protection
- Automatic Recharge
- Battery Temperature Sensing
- Charge state pairs of output, no battery and fault status display
- Charge Current Monitor Output for Gas Gauging
- Automatic Low Power Sleep Mode When Input Supply Voltage is Removed
- Soft-Start Limits Inrush Current
- Chip Enable Input

### Application

- Cellular phones, PDAs
- Portable Media Players
- Digital Still Cameras
- Bluetooth & GPS Applications
- Mobile Internet Device
- Charging Docks and Cradles



# ACE40515D

## 1.2A Linear Lithium Battery Charger With Thermal Regulation

### Absolute Maximum Ratings <sup>(1)</sup>

Parameter	SYMBOL	Max	Unit
Input Supply Voltage <sup>(2)</sup>	$V_{CC}$	-0.3~26	V
TEMP, CE, PROG Pins Voltage <sup>(2)</sup>		-0.3~7	
BAT Pin Voltage <sup>(2)</sup>		-5~12	
CE $\overline{\text{CHRG}}$ $\overline{\text{DONE}}$ Pins Voltage <sup>(2)</sup>		-0.3~28	
BAT Short-Circuit Duration		Continuous	
BAT Pin Output Current (Continuous)	$I_{BAT}$	1500	mA
Output sink current	$I_{\overline{\text{CHRG}}}, I_{\overline{\text{DONE}}}$	10	mA
Power dissipation	$P_D$	1500	mW
Operating Ambient Temperature Range <sup>(3)</sup>	$T_A$	-40~85	°C
Junction Temperature	$T_J$	-40~150	°C
Storage Temperature	$T_{stg}$	-40~125	°C
Lead Temperature (Soldering, 10s)	$T_{solder}$	260	°C
ESD rating <sup>(4)</sup>	HBM	2000	V
	MM	200	V

- Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under recommended operating conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- All voltages are with respect to network ground terminal.
- The ACE40515D are guaranteed to meet performance specifications from 0°C to 70°C. Specifications over the -40°C to 85°C operating temperature range are assured by design, characterization, and correlation with statistical process controls.
- The human body model is a 100pF capacitor discharged through a 1.5kΩ resistor into each pin. The machine model is a 200pF capacitor discharged directly into each pin.

### Recommended Operating Conditions

Parameter	Symbol	Min	Max	Units
Input voltage range <sup>(5)</sup>	$V_{CC}$	4.5	24	V
BAT Pin Output Current (Continuous)	$I_{BAT}$		1200 <sup>(6)</sup>	mA
Fast-charge current programming resistor <sup>(7)</sup>	$R_{PROG}$	1	10	kΩ

- If  $V_{CC}$  is between UVLO and 4.5V, and above the battery voltage, then the IC is active (can deliver some charge to the battery), but the IC will have limited or degraded performance (some functions may not meet data sheet specifications). The battery may be undercharged ( $V_{FLOAT}$  less than in the specification), but will not be overcharged ( $V_{FLOAT}$  will not exceed specification).
- The thermal regulation feature reduces charge current if the IC's junction temperature reaches 125°C; thus, without a good thermal design the maximum programmed charge current may not be reached.
- Use a 1% tolerance metal film resistor for  $R_{PROG}$  to avoid issues with the  $R_{PROG}$  short test when using the maximum charge current setting.




# ACE40515D

## 1.2A Linear Lithium Battery Charger With Thermal Regulation

### Ordering information

ACE40515D XX XX+ H

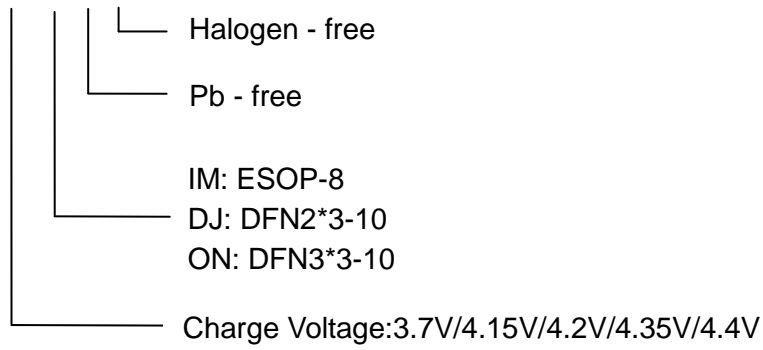



# ACE40515D

## 1.2A Linear Lithium Battery Charger With Thermal Regulation

### Notes

ACE does not assume any responsibility for use as critical components in life support devices or systems without the express written approval of the president and general counsel of ACE Technology Co., LTD. As sued herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ACE Technology Co., LTD.  
<http://www.ace-ele.com/>